

Supply Gasket

Item Code and Description

- a. WP3301-SUP . . . Supply Gasket—1 gasket
- b. WP3312-SUP . . . Supply Gasket—12 gaskets

General Product Description

- a. a rugged, flexible, pre-formed gasket with center membrane for sealing around supply lines to prevent penetration of moisture and provide a sound foundation for tile or stone overlays
- b. anti-fracture protection between substrates and hard surface coverings
- c. embed with TANK/10® waterproofing compound

Physical Characteristics

- a. pre-formed gasket with center membrane having a pre-punched 5/16" dia. hole
- b. substrate: two layers of nonwoven polypropylene
- c. membrane: polyurethane
- d. color: dark gray
- e. dimensions: 4¾" × 4¾"
- f. thickness: approximately 1mm

Performance Characteristics

- a. a flexible fabric reinforcement for embedment around supply fittings in a shower
- b. use for supply lines to shower heads, hand held sprays, jets, and steam heads
- c. identical on both surfaces (no top or bottom)
- d. membrane stretches to fit over supply pipe up to ½" ID (inside diameter)
- e. impermeable
- f. bonds well with TANK/10® waterproofing compound
- g. remove all dirt, debris, and contaminants from surfaces prior to embedding gasket
- h. surfaces must be completely dry before embedding tape
- i. gasket is not designed as a wear surface; cover with tile, stone, or other appropriate material
- j. material safety data sheet available on request

Compliance


- a. ICC PMG-1248 lists compliance with:
 1. 2015, 2012 and 2009 International Residential Code® (IRC)
 2. 2015, 2012 and 2009 International Plumbing Code® (IPC)
 3. 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
 4. 2010 and 2005 National Plumbing Code of Canada (NPC)
 5. ANSI A118.10-2008 American National Standard Specification for Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation
 6. ICC-ES AC 115-2008 Acceptance Criteria for Waterproof membranes for Flooring and Shower Lining




Other Information

- a. manufacturer warrants to the original owner of the property where product is installed that joint reinforcement tape and gaskets shall be free from defects in the material when properly applied for a period of five years

Supply Gasket

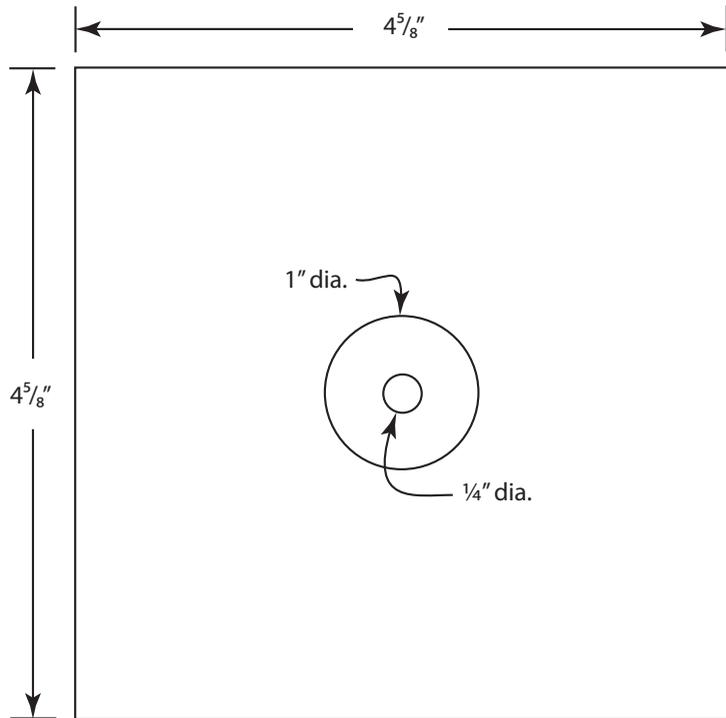

Supply Gasket
WP3301-SUP . . . 1 gasket

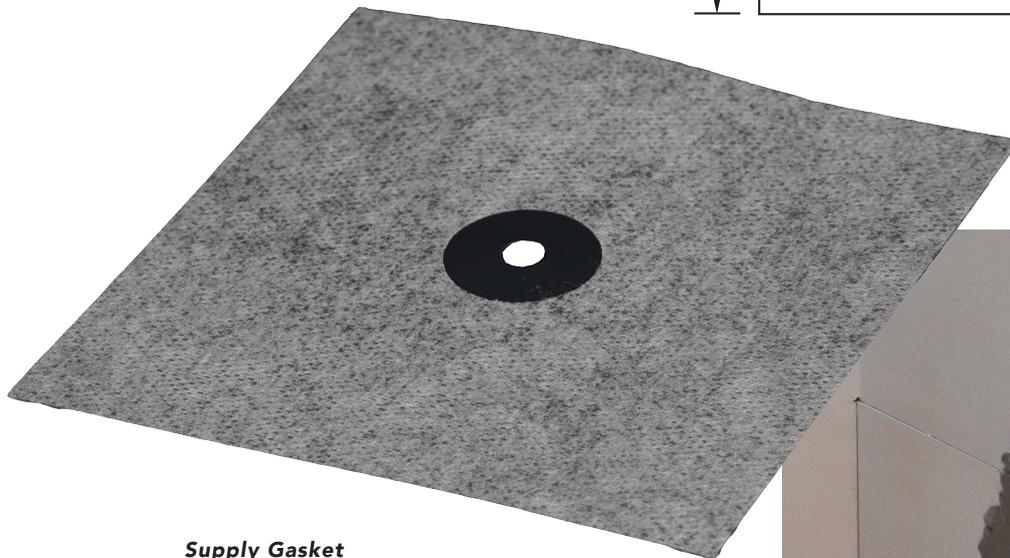

Supply Gasket
WP3312-INT . . . 12 gaskets



Embed a supply gasket around supply pipes in the wet area for shower heads, hand held devices, and jets or sprays.