

## TrueDEK Ultimate Linear Shower Base



### Product Overview

Constructed from super strong yet lightweight compression molded glass-fiber reinforced plastic (GRP), TrueDEK Ultimate Linear shower bases can support up to 840lbs, and create one large (72" x 48") continuous pitch to the stylish linear drain, enabling safe, curbless access to the shower, ideal for those in wheelchairs or living with disabilities.

Trim down easily on site, you can even install multiple bases to create a bigger shower area if required, with countersunk, pre-bored drill holes along the perimeter for quick installation.

### Physical Characteristics

- + Made from compression molded glass-fiber reinforced plastic (GRP)
- + 72" x 48"
- + 840lbs max. capacity when installed on 16" o.c. joist systems
- + Approx. weight 105lbs
- + Waffle underside design
- + Cut down using standard power tools (within 6" of drain)
- + Install on wooden joists (no need to notch, lower or alter joists), sub-floor, or concrete
- + Single, continuous pitch
- + 2% per foot gradient
- + 7/8" thick around perimeter
- + 13/4" wide leveling rim around perimeter with pre-bored, countersunk pilot holes
- + 2" drain hole diameter
- + 2" PVC drain coupling supplied
- + 68" long stainless-steel linear, tile-in drain cover supplied
- + Finish with tile or stone (between 1/4"-1" thick)
- + Durable and re-useable
- + Requires an ARC Waterproofing Kit
- + Stainless-steel edge trims available a la carte

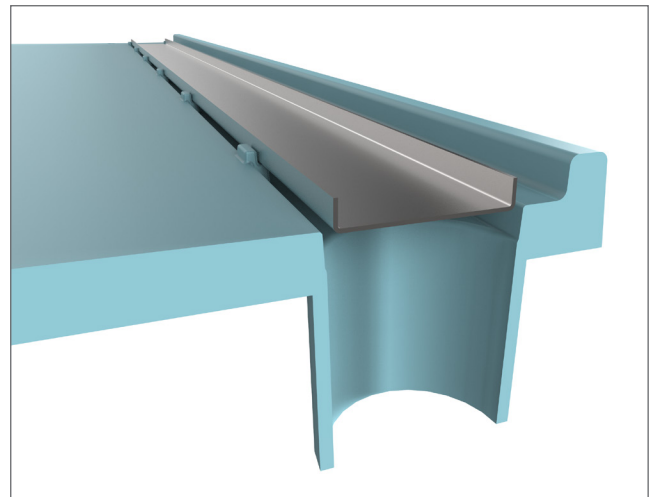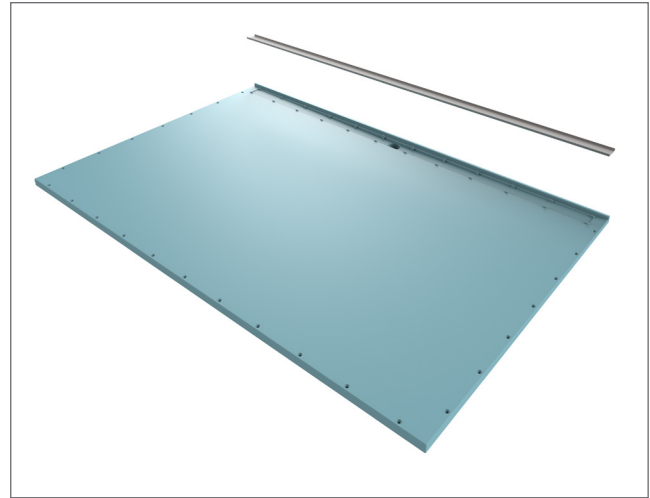

### Other information

- + AKW limited lifetime warranty on base and drain cover
- + 10-year manufacturer warranty on drain coupling



## TrueDEK Ultimate Linear Shower Base

### Performance Characteristics

- + Pre-pitched for quick and efficient drainage
- + Continuous pitch is ideal for large format tiles
- + Offers curbless, zero-entry access into the shower along the longest edge
- + Both GRP base and stainless-steel drain cover can be cut down in size on site
- + Waffle underside ensures rigidity while being lightweight
- + Install multiple adjacent bases to create a larger shower
- + 2" drain outlet is the only part sitting below the floor joist system
- + Can support up to 840lbs when installed on proper joists spaced 16" o.c., and supplemented with perimeter and drain hole blocking
- + Durable and re-useable; remove and replace tile without damaging the base
- + Drain cover is tileable, ensuring consistency of finish
- + Stainless steel trims ensure a tidy join between pitched base and adjacent level floor


### Compliance

#### a. ICC PMG-1223 lists compliance with:

1. 2015, 2012 and 2009 International Residential Code® (IRC)
2. 2015, 2012 and 2009 International Plumbing Code® (IPC)
3. 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
4. 2010 and 2005 National Plumbing Code of Canada (NPC)
5. IAPMO PS106-2015e1 for prefabricated, tileable shower receptors
6. CSA B45.5/IAPMO Z124-2011, Plastic Plumbing Fixtures


#### b. QAI Laboratories test report no. RJ4241-1

1. Meets conditions of classification for 30-minute flame spread index and smoke developed index per ASTM E84 requirements

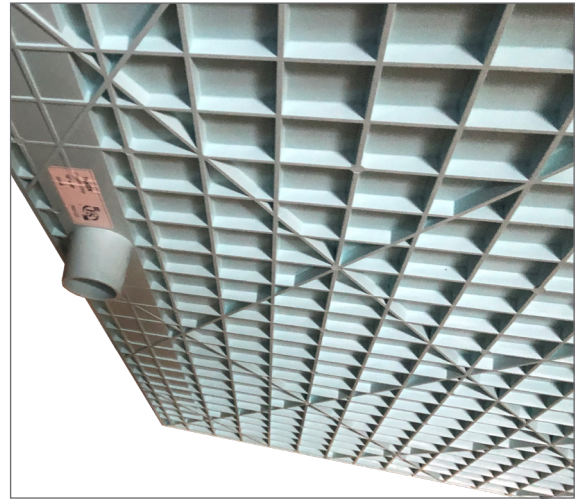

## TrueDEK Ultimate Linear Shower Base

### Dimensions

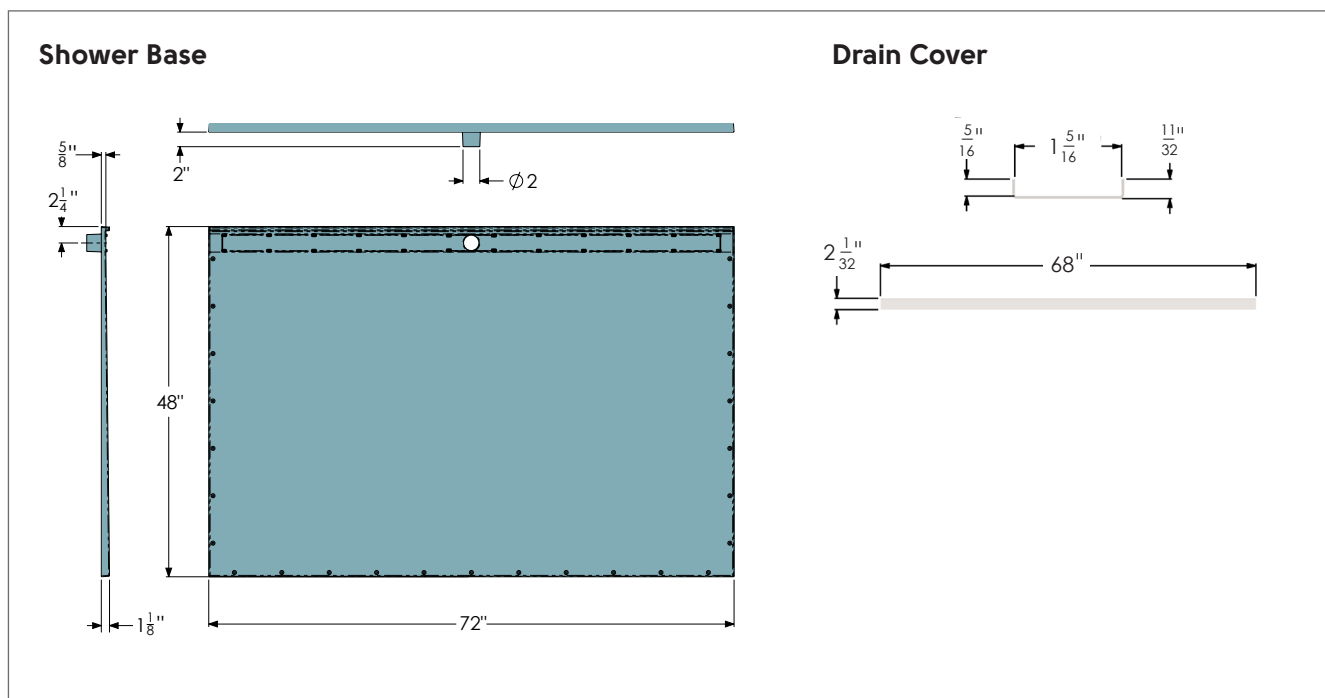

### Product Codes

TrueDEK Ultimate Linear Shower Base 72" x 48"

21240

### Spares:

TrueDEK Ultimate Linear Drain Cover

21-001-002

### A La Carte Items:

TrueDEK Ultimate Linear Edge Trim 1/4" Tile (Right)

21241R

TrueDEK Ultimate Linear Edge Trim 1/4" Tile (Left)

21241L

TrueDEK Ultimate Linear Edge Trim 3/8" Tile (Right)

21242R

TrueDEK Ultimate Linear Edge Trim 3/8" Tile (Left)

21242L

TrueDEK Ultimate Linear Edge Trim 1/2" Tile (Right)

21243R

TrueDEK Ultimate Linear Edge Trim 1/2" Tile (Left)

21243L

Pro Waterproofing Kit

WP1090-PRO

Premium Waterproofing Kit

WP1000-PRE