

## FastDEK Linear Shower Base

### Product Overview

With a stylish linear drain cover, FastDEK Linear Shower Bases offer superior strength with a maximum capacity of 546lbs, and contemporary styling with a textured stone-effect, slip-resistant finish that does not require covering with tile or stone.

FastDEK Linear bases can be installed above the floor for low-level access or directly onto joists to enable barrier-free showering, which makes the shower easier to clean, safer to use, and more accessible to seniors, people with health conditions, or those in wheelchairs.

### Features & Benefits

- + Made from lightweight yet strong compression molded glass-fiber reinforced plastic (GRP), ideal for accessible showers
  - + Pre-finished with contemporary textured stone-effect surface that offers superior slip resistance
  - + Can be installed on top of subfloor or directly onto joists for either low-level or zero-entry access to the shower
  - + Install on wood or engineered joist systems, on subfloor, or concrete
  - + Can support up to 546lbs when installed on 16" o.c. joist systems supplemented with perimeter and drain hole blocking
  - + 1" thickness reduces the risk of trips and falls when installed on top of the subfloor for low-level shower
  - + When installed directly onto joists, the curbless design increases safety by providing barrier-free access for seniors, people with disabilities, or those in wheelchairs
  - + Webbed design on underside of base increases strength while reducing weight, and offers excellent shock and impact resistance
- + Can be used to create an ADA compliant shower, seek guidance locally for more information about compliancy and building regulations
  - + 4 pre-sloped gradient planes for quick, efficient drainage (6-7 gallons per minute) which reduces the risk of pooling or flooding
  - + Central linear stainless-steel drain cover included
  - + Complete installation with an AKW FastDEK Installation Kit (available a la carte)



## FastDEK Linear Shower Base

### Technical Specification

- + Size Options: 3
- + Color: White
- + Material: Glass-fiber reinforced plastic (GRP)
- + Weight capacity: 546lbs
- + Weight: approx. 43 ½ – 46 ½lbs (depending on size)
- + Gradient: ≥1% per foot (depending on length of pitch)
- + Spans 16" o.c. joist systems
- + Perimeter: 1" thick
- + Drain hole diameter: 3 ¼"
- + Compatible with standard 2" drain connectors
- + Pre-finished with textured stone-effect surface
- + Drain concealed beneath stylish stainless-steel drain cover
- + Webbed design on underside of base
- + Requires a FastDEK Installation Kit:
  - 6 x 10 oz. tubes of Tank/10 polyurethane construction adhesive
  - 2 x 10 oz. Silicone caulk
  - 20" Joint reinforcement tape
  - 1 x Drain connector

### Compliance

#### a. ICC PMG-1223 lists compliance with:

- 1 2015, 2012 and 2009 International Residential Code® (IRC)
- 2 2015, 2012 and 2009 International Plumbing Code® (IPC)
- 3 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
- 4 2010 and 2005 National Plumbing Code of Canada (NPC)
- 5 IAPMO PS106-2015e1 for prefabricated, tileable shower receptors
- 6 CSA B45.5/IAPMO Z124-2011, Plastic Plumbing Fixtures


#### b. QAI Laboratories test report nos. TJ5925-1 and TJ5925-2

### Warranty & Approvals

- + AKW Limited lifetime warranty
- + Can be used to create an ADA compliant shower



### Dimensions

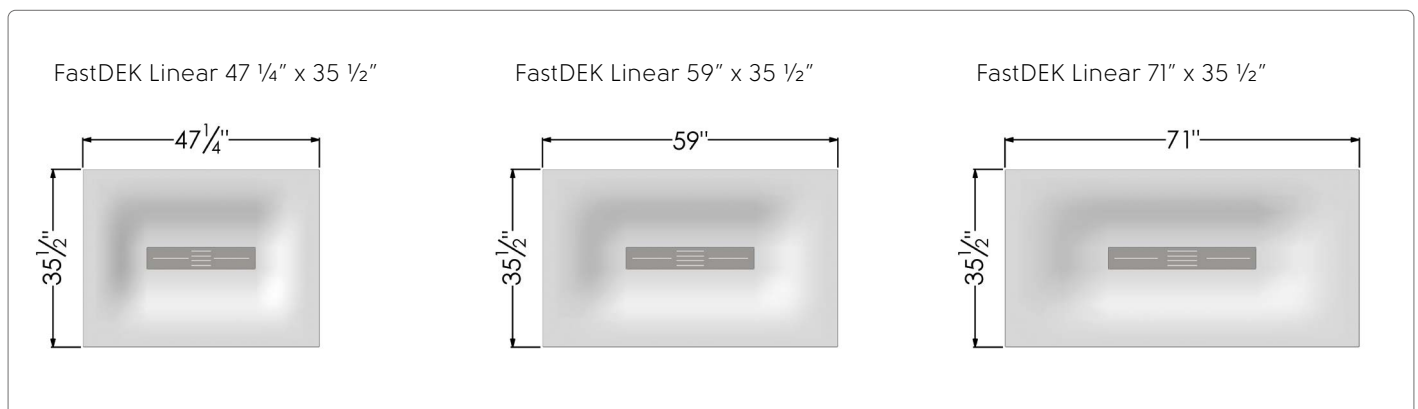

**Product Codes**

**FastDEK Linear Shower Bases**

FastDEK Linear 47 1/4" x 35 1/2"	23964-WH
FastDEK Linear 59" x 35 1/2"	23977-WH
FastDEK Linear 71" x 35 1/2"	23975-WH

**FastDEK Installation Accessories**

FastDEK Ramp	12844
FastDEK Ramp Corner	12843
FastDEK Installation Kit	FB2000-IK

**Spares**

FastDEK Linear Drain Cover 21 3/4"	23957-WH
FastDEK Linear Drain Cover 25 1/3"	23958-WH
FastDEK Linear Drain Cover 29 1/2"	23959-WH

