

## Glass Shower Screen

### Item Code and Description

- a. LB00108 . . . Glass shower screen, wall mounted
- b. 39<sup>3</sup>/<sub>8</sub>" wide × 76<sup>3</sup>/<sub>4</sub>" tall

### General Product Description

- a. a glass screen for containing shower spray and enhancing a shower's appearance

### Physical Characteristics

- a. composition: tempered glass, aluminum, and plastic
- b. aluminum wall channel compensator, edge trim, and tie bar assembly
- c. plastic foot spcers, foot cover, end caps, tie bar receptor, and bottom seal
- d. wall channel compensator, edge trim and tie bar assembly are polished to a bright luster
- e. plastic foot cover has "chrome" appearance to match polished aluminum components
- f. edge trim parts are pre-installed
- g. bottom seal is flexible plastic
- h. bottom edge of glass remains about 1/2" above floor
- i. glass thickness: 6mm (about 1/4")
- j. tie bar length: 55"
- k. fasteners not included due to the variety of wall and floor types

### Performance Characteristics

- a. wall channel allows adjustments to install the screen level and plumb
- b. aluminum is rustproof
- c. tempered glass resists breakage and reduces risk of injury if broken
- d. mount "fixed" edge of screen to a wall
- e. tie bar stabilizes "free" edge of screen to a wall
- f. plastic seal may be installed to fill gap between glass and floor (most users prefer to leave it off for ease of cleaning)
- g. foot spacers allow installer to offset glass above floor
- h. cut tie bar and wall channel compensator to desired length with metal cutting blade
- i. post on "free" edge can accommodate up to two tie bars (one tie bar to a second screen and one to a wall)
- j. accessory tie bars are available to join one screen to another screen (not included with screens)
- k. for any fastener penetrations into the floor, fill pilot holes with silicone caulk prior to driving screws

### Other Information

- a. 5-year limited warranty when installed in commercial settings
- b. 10-year limited warranty when installed in residential settings
- c. see AKW warranty for details

# Glass Shower Screen



Install foot spacer(s) onto post.



Slide cover over foot spacer(s).



Slide seal onto glass if desired.



Install base for tie bar receptor.




Install tie bar receptor and tie bar.




Add decorative cap onto tie bar receptor.



Install floor spacer for "fixed" edge.

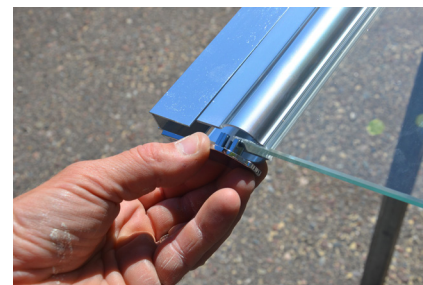

Install decorative cap for "fixed" edge.

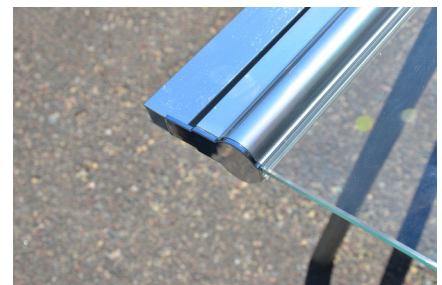

Decorative cap installed.

